


High Pressure Cleaner

HDD1240

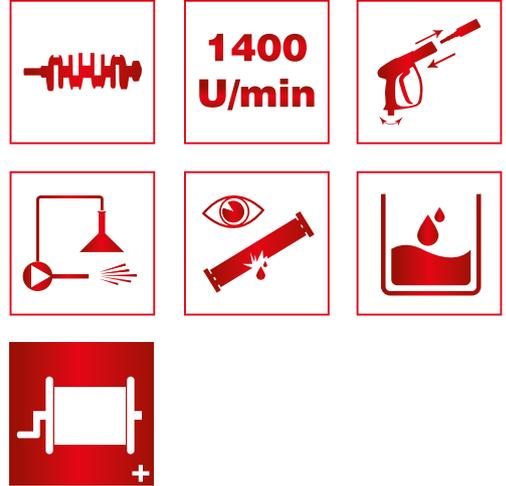

Type		HDD1240-Standard	HDD1240-Premium
Engine	Diesel	<ul style="list-style-type: none"> 10m HP-Hose DN08 - 315bar Trigger-Gun with swivel Spray-Lance 900mm c/w Nozzle-Protection Stainless-Steel Jet-Nozzle 25° Water-Supply separation acc. water reg. Chemical supply in high-pressure Jet c/w Metering-valve With electric-starter 	<ul style="list-style-type: none"> Hose-Reel 20m HP-Hose DN08 - 315bar Trigger-Gun with swivel Spray-Lance 900mm c/w Nozzle-Protection Stainless-Steel Jet-Nozzle 25° Spray-Lance 900mm c/w Rotary-Nozzle Water-Supply separation acc. DIN EN 1717 class 4 Chemical supply in high-pressure Jet c/w Metering-valve With electric-starter
Operating pressure	30-180bar/3-18MPa		
Max. pressure	200bar/20MPa		
Discharge capacity	300-1000l/h		
Nozzle size	050		
Max. Inlet temperature	30-98°C		
Pump speed	1400rpm		
Connected load	10h.p. Diesel Yanmar		
Electric-Starter	Starter-Generartor		
Weight net/with package		238kg/251kg	246kg/259kg
Dimensions device/with package (LxWxH)		120x80x73,5cm/121x81x116cm	120x80x100,5cm/121x81x135cm

Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of steel galvanized and powder-coated, triplex-piston pump with brass pump head, high-performance ceramic piston, stainless-steel valves, leakage-return, gearbox for reducing the high-pressure pump speed, separately driven burner motor for heating, 4-fold safety system, consisting of pressure-switch, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, safety-valve and thermostat, automatic load-idle speed control, 4 large rubber-pneumatic tires for rough terrain, storage possibility for all accessories, removable standard diesel-canister 20l, external 2-way detergent supply, removable ergonomic drawbar.

Art.No.	158001	158002
---------	--------	--------