


# High Pressure Cleaner

## HSC1140-INOX Gas

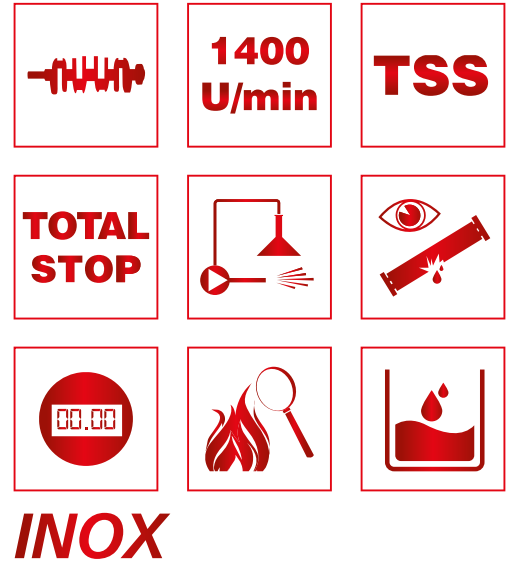

Type		HSC1140-INOX Gas
Voltage	3/N/PE/AC/50Hz/400V	<ul style="list-style-type: none"> <li>Stainless steel (food safe)</li> <li>Etronic I - Controls</li> <li>10m HP-Hose DN08 - 315bar</li> <li>Trigger-Gun with swivel</li> <li>Spray-Lance 900mm c/w Nozzle Protection</li> <li>Stainless-Steel Jet-Nozzle 25°</li> <li>Water-Supply separation acc. DIN EN 1717 class 4</li> <li>Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>
Operating pressure	30-180bar/3-18MPa	
Max. pressure	200bar/20MPa	
Discharge capacity	300-1000l/h	
Nozzle size	055	
Hot water capacity	30-70°C	
Pump speed	1400rpm	
Heating power	50kW	
Connected load	6,5kW/11,7A	
Electrical protection	3x16A slow	
Weight net/with package		313kg/330kg
Dimensions device/with package (LxWxH)		122x75,5x162,5cm/125x81,5x175,5cm
<p>Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), suitable for floor installation, 20mm PU-sound and thermal insulation, thermostatic chassis electric heating 80W, Stainless steel water heater 65l with gas racer DIN EN 15502-2-1 (natural gas or LPG) buffer storage for immediate hot water use and hot water preparation during breaks in stand-by mode, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic I - controls: (start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, optical flame monitoring with photoelectric cell and fault indicator-light) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, integrated diesel-tank 60l, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable.</p>		
Art.No.		52701