


High Pressure Cleaner

KD940-F

Food progressing
with stainless steel pump, hot water resistant

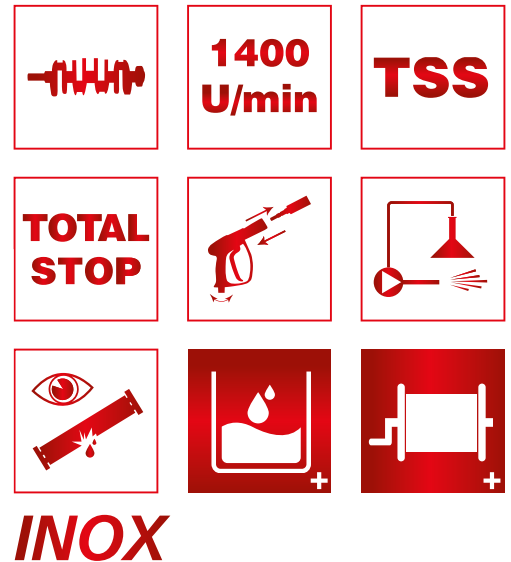

Type	KD940-F-Standard		KD940-F-Premium	
Voltage	3/PE/AC/50Hz/400V	<ul style="list-style-type: none"> 10m HP-Hose DN08 - 315bar blue Trigger-Gun with swivel Double Spray-Lance 900mm c/w Nozzle-Protection Spray-Lance 900mm c/w Vario-Nozzle Stainless-Steel Jet-Nozzle 25° 17l Cleaning-Detergent tank Detergent-Supply c/w Low-Pressure Injector and Metering-valve 	<ul style="list-style-type: none"> Hose-Reel 15m HP-Hose DN08 - 315bar blue Trigger-Gun with swivel Double Spray-Lance 900mm c/w Nozzle-Protection Stainless-Steel Jet-Nozzle 25° High and low pressure jet nozzle 25° Soft Foam Kit with 2l foam detergent tank 15l Water-Storage tank Water-Supply separation acc. DIN EN 1717 class 4 Chemical supply in high-pressure Jet c/w Metering-valve 	
Operating pressure	30-130bar/3-13MPa			
Max. pressure	150bar/15MPa			
Discharge capacity	300-840l/h			
Nozzle size	060			
Max. Inlet temperature	80°C			
Pump speed	1400rpm			
Connected load	4,5kW/7A			
Electrical protection	3x16A slow			
Weight net/with package		54kg/73kg		58kg/78kg
Dimensions device/with package (LxWxH)		80,5x48,5x95cm/109x63x104cm		80,5x48,5x95cm/109x63x104cm

Food progressing with abrasion resistant high pressure hose blue, self-supporting, robust, corrosion free, rotation-moulded device-chassis for food industry, stainless steel, impact-resistant device-cover made of ABS, triplex-piston pump with chrome, nickel plated pump head (hot water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, start-stop system with switch-off delay, total-switch-off after 20min, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 2 large rubber wheels for rough terrain with rubber stand, storage possibility for all accessories, robust rotary on-off switch, 7,5m connection cable, removable ergonomic drawbar stainless steel.

Art.No.	561003	561004
---------	--------	--------